




DMT10768T097_32W

9.7 Inches, 1024xRGBx768, 16.7M Colors, Android LCM

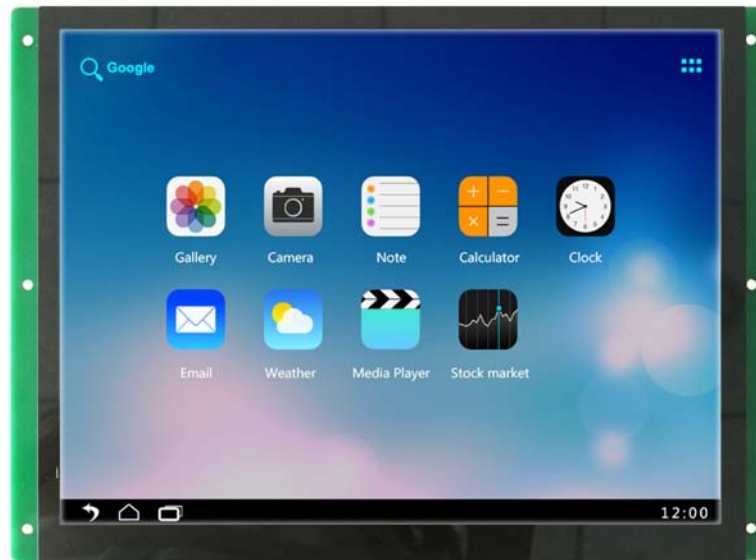

Record of Revision

Revise Date	Content
2014-05-20	First Edition

● Display

Item	Parameter	Description
Color	16.7M (16777216) colors	24-bit color 8R8G8B
Active Area (A.A.)	196.6mm (W) x147.5mm (H)	1024x768
View Area (V.A.)	200.9mm (W) x152.3mm (H)	1024x768
Resolution	1024x768	
Backlight	LED	-
Brightness	300 nit (DMT10768T097_32WN)	64 levels adjustment
	250 nit (DMT10768T097_32WT)	64 levels adjustment

● Voltage & Current

Item	Conditions	Min	Typ.	Max	Unit
Power Voltage	Voltage jumper is ON	-	5.0	-	V
	Voltage jumper is OFF(Default)	6.0	12.0	42.0	V
Operation Current	VCC = +12V, Backlight on	-	440	-	mA
	VCC = +12V, Backlight off	-	230	-	mA
Recommended power supply: 12V 1A DC					

● Reliability Test

Item	Conditions	Min	Typ.	Max	Unit
Working Temperature	60%RH at 12V voltage	-20	25	70	°C
Storage Temperature	-	-30	25	85	°C
Working Humidity	25°C	10%	60%	90%	RH
Protective Paint	-	-	None	-	-
Aging Test	-	-	24	-	H

● Interface


Item	Conditions	Min	Typ.	Max	Unit
Baudrate	Standard	1200	115200	921600	bps
	User define	1200	-	1000000	bps
Output Voltage (TXD, BUSY)	Output 1, Iout = 1mA	3.0	3.2	-	V
	Output 0, Iout = -1mA	-	0.1	0.2	V
Input Voltage (RXD, I/O)	Input 1, Iin = 1mA	2.0	3.3	15.0	V
	Input 0, Iin = -1mA	-15.0	0.0	0.3	V
Interface	Mode is determined by Jumper: ON = 8N1, 3.3V TTL/CMOS; OFF = 8N1, RS232				
Socket	8Pin_2.54mm				
USB	Yes (USB2.0, FAT32 file format)				
SD slot	Yes (FAT32 file format)				

● Peripherals

Peripherals Acquired	
Peripherals	DMT10768T097_32WN : WIFI, Ethernet, Analog Video optional DMT10768T097_32WT : Capacitive touch screen, G+G mode glass (Hardness: 5H~6H), WIFI, Ethernet, Analog Video optional

● Packing Capacity & Dimension

Dimension				
Dimension	232.4 (W) x170.7 (H) x24 (N) / 25.5 (T)mm			
Net Weight	520g (DMT10768T097_32WN)			
	580g (DMT10768T097_32WT)			
Packing Capacity				
Model	Size	Layer	Quantity/Layer	Quantity(Pcs)
Carton1	220mm(L)x160mm(W)x47mm(H)	-	-	-
Carton2	250mm(L)x200mm(W)x80mm(H)	2	1	2
Carton3	320mm(L)x270mm(W)x80mm(H)	-	-	-
Carton4	450mm(L)x350mm(W)x300mm(H)	1	10	10
Carton5	600mm(L)x450mm(W)x300mm(H)	1	20	20

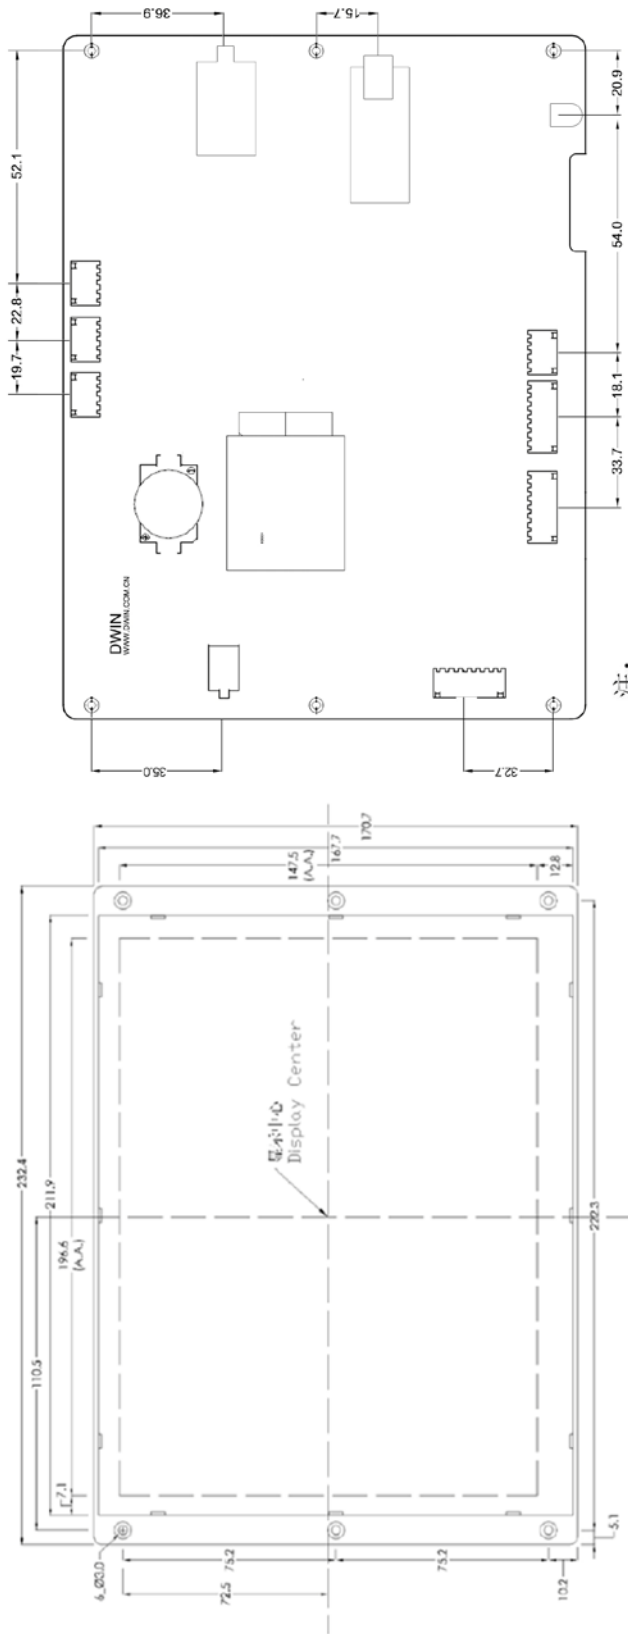

注:

1. 尺寸定位基准为定位孔

Location hole is used as position reference

2. 未标注公差为 $\pm 0.3\text{mm}$

Unmarked Tolerance is $\pm 0.3\text{mm}$

3. 虚线为显示区域 / Active area is marked in dashes.

引脚名称	引脚编号	引脚类型	串口0说明
VCC	1,2	P	电源输入/Power Input
NC	3	-	未定义/Not Defined
TXD0	4	OUT	迪文屏串口输出/OUT
RXD0	5,6	IN	迪文屏串口输入/DIN
GND	7,8	P	公共地/DND

引脚名称	引脚编号	引脚类型	串口1/2/4说明
TXD4	1	OUT	迪文屏串口输出/OUT
RXD4	2	IN	迪文屏串口输入/DIN
GND	3	P	公共地/DND
TXD1	4	OUT	迪文屏串口输出/OUT
RXD1	5,6	IN	迪文屏串口输入/DIN
TXD2	7	OUT	迪文屏串口输出/OUT
RXD2	8	IN	迪文屏串口输入/DIN

型号	DMT10768T097_32W		
图纸	A4	绘图	DWIN 日期
比例	1:1	审核	日期
单位	mm	批准	日期

